




4069ERT 4069RT

Construction-Grade Electric & Diesel-Powered Scissor Lifts

- 40-ft (12.2-m) Platform Height
- Standard 4-Wheel Drive with Quad-Trax Traction Control
- 40% Gradeability
- Standard Integrated Sheet Material Rack Designed & Approved By MEC
- Two Full Steps Lower At 51" Platform Entry Height
- Fully Proportional Drive & Lift Controls
- 48v DC Electric or 24.8 hp (18.5 kW) Diesel Power
- 69" (175 cm) Overall Width
- Roll-Out Deck Extension with Incremental Lock Positions
- Patented Powerlift² Scissor System
- Optional Outriggers with One-Touch Auto Leveling
- Optional Pipe Rack/ Sheet Material Clamps

*Bridging The Gap
Between Slab
and RT Scissor Lifts*

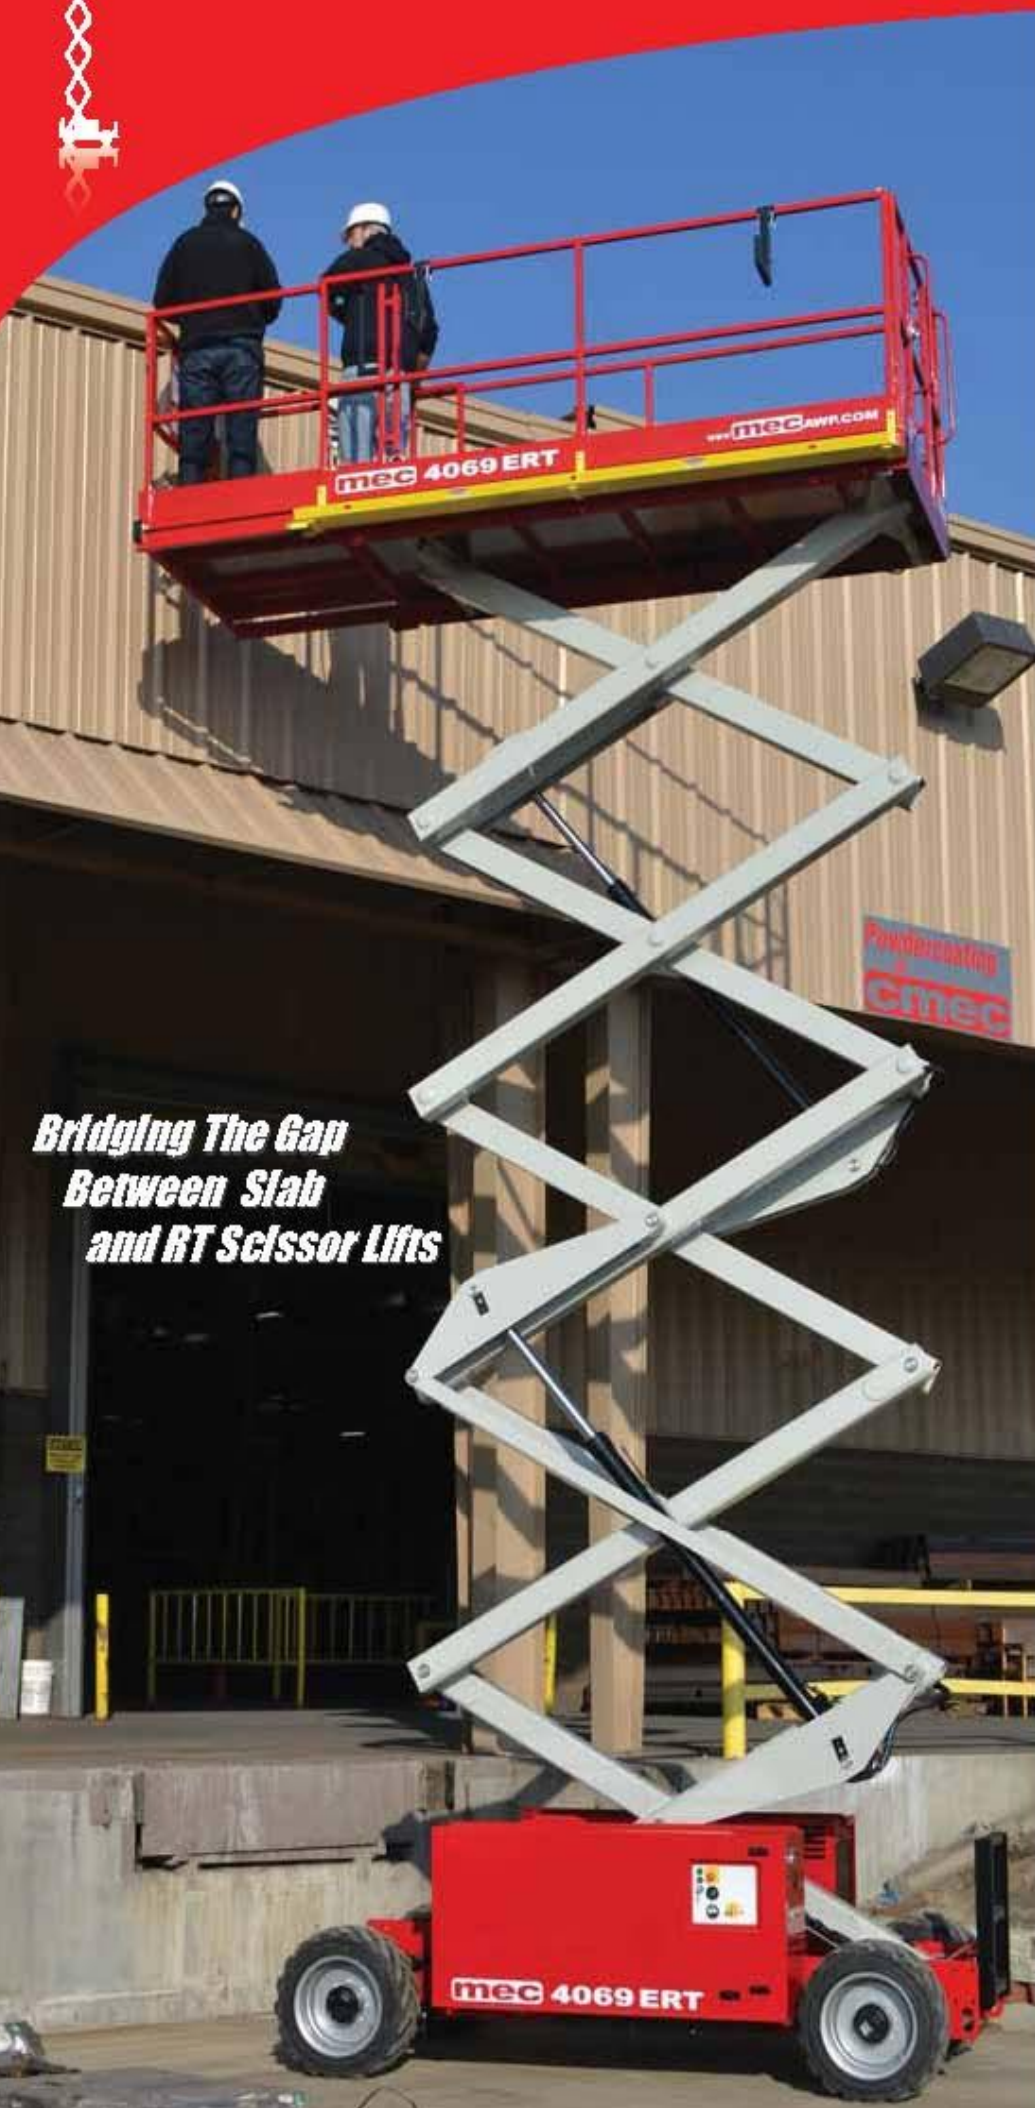

Features

Work Area

Standard integrated sheet material rack designed and approved by the manufacturer
 Super-low platform entry height
 Roll-out deck extension with incremental locking positions
 Standard swing gate
 110V Power to Platform

Performance

Standard 4-Wheel Drive with Quad-Trax Traction Control
 Fully Proportional Drive and Lift Controls

Power

48v 375 Ah (420 Ah optional) DC Electric or
 24.8 hp (18.5 kW) Kubota Diesel Power

Serviceability

Lubrication-free scissor bearings
 Easy maintenance access to mechanical and electrical components without raising platform or swinging out trays
 Logically grouped components and numbered wiring for easy reference

Safety

Dedicated compartments protect electrical and hydraulic components
 Emergency shut-off at platform and lower controls
 Non-skid metal deck construction
 Descent alarm
 Drive speed interlock
 Multi-axis tilt sensor
 Multiple disc brakes, manual brake release
 Scissor maintenance lock
 4-wheel automatic parking brake

Other Features

Industrial grade, solid-state battery charger
 Fold down guardrails
 Hour meter
 Powder coat finish
 Battery charge indicator
 Machine tie downs

Optional Features

| | |
|--------------------------------|------------------------------|
| Auto-Leveling Outriggers | Lanyard Attachments (6) |
| Flashing Beacon (continuous) | Pipe Cradle |
| Automotive Horn | Platform Work Lights |
| Removable Upper Controls | Non-Marking RT Tires |
| Air Line to Platform | Foam Filled Tires |
| All Motion Alarm | Turf Terrain Tires |
| Battery Charge Indicator | CE Compliant Options |
| 1- or 2-Year Extended Warranty | Australian Compliant Options |
| | CSA Compliant Options |



MEC Australia

Unit 4 18-20 Prospect Place, Berrinba, Queensland, Australia, 4117
 PO Box 1792 Sunnybank Hills, Queensland, Australia, 4109
 P: 07 3808 8826 / F: 07 3808 8025
 E: admin@mecaustalia.com.au
 W: www.mecaustalia.com.au

Provisional specifications. Manufacturer reserves the right to make changes in pursuit of continuous improvement.

4069 ERT/RT

| | U.S | Metric |
|--------------------------------|--|---------------|
| Heights | | |
| Working Height* | 46 ft.* | 14 m* |
| Platform Height | 40 ft. | 12.2 m |
| Stowed Height (Top Guardrail) | 98.5 in | 2.5 m |
| Stowed Height (Rails Folded) | 78 in. | 1.98 m |
| Stowed Height (Platform Floor) | 51 in. | 1.3 m |
| Guardrail Height | 43.5 in. | 1.11 m |
| Toeboard Height | 6 in. | 15 cm |
| Ground Clearance | 10 in. | 25 cm |
| Dimensions | | |
| Length - Stowed (Overall) | 126 in. | 3.2 m |
| Width | 69 in | 1.75 m |
| Platform Length (Extended) | 166 in. | 4.22 m |
| Platform Length (Retracted) | 118 in. | 3 m |
| Roll-Out Deck Length | 48 in. | 1.21 m |
| Platform Width (Outside) | 59 in. | 1.5 m |
| Sheet Rack Width | 7 in. | 18 cm |
| Wheelbase | 94.5 in. | 2.4 m |
| Total Lift Capacity | 800 lb | 360 kg |
| Personnel Capacity | 2 | |
| Roll-Out Deck Capacity | 250 lbs | 113 kg |
| Sheet Rack Capacity | 300 lbs | 136 kg |
| Speed | | |
| Drive Speed | 3.75 mph | 6.0 km/h |
| Performance | | |
| Gradeability | 40% | |
| Turning Radius (Inside) | 79 in. | 2 m |
| Optional Outrigger Range | 10° side to side | |
| Weight (Approximately**) | 10,800 lbs. | 4900 kg |
| Brakes | Spring-applied hydraulically-released 4-wheel multi-disc | |
| Power Source | 48 v DC, 375Ah battery pack or 24.8 hp Kubota D1105 | |
| Drive | 4-Wheel Drive | |
| Controls | Proportional drive and lift controls | |
| Tires (RT Tread) | 26 in. x 12 in. | 66 cm x 33 cm |

*Metric equivalent of working height adds 2m to platform height. U.S. adds 6 ft. to platform height.

**Including outriggers. Weight may change with certain options or configurations. When platform is elevated, all models must be on arm, level surface.

Important - MEC scissor lifts must be on a hard level surface while elevated.

Warranty - MEC Aerial Work Platforms carry a one (1) year warranty on defective component parts and a five (5) year warranty on defective structural parts. This warranty applies to the original owner only. Consult your MEC dealer for warranty details.

Distributed by:

Meets or exceeds the requirements of ANSI A92.6-2006, CSA B354.2-01, AS 1418.10 and CE Compliance as applicable. Specifications subject to change without notice. Photos and diagrams in this brochure are for illustrative purposes only. Contact your MEC distributor for detailed instructions on the proper use and maintenance of this equipment.